
Data sheet Product DILS 40 6 PK 3

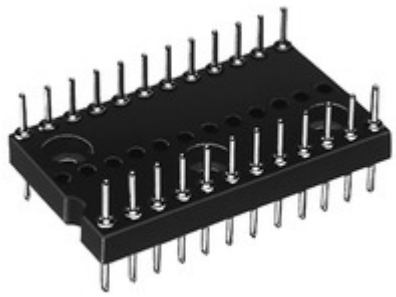


Sockets > High-precision sockets and plugs for DIL-IC
DIL adaptor plugs

Features

no. of contacts	40
contact material	CuZn-alloy
surface contact / contact sleeve	Ni+≥0.2µm Au
shock resistance	50 g
vibration resistance max.	15 g
volume resistance	10 mΩ
contact resistance	4 mΩ
contact resistance after 1000 cycles	7 mΩ
capacity between two adjacent contacts	0,4 pF
nominal current	1.5 A
nominal voltage	150 V DC
test voltage	1000 V
insulating body material	PPS, GF
temperature range	• -40°C... +200°C • (260°C/10 s)
class of inflammability	UL 94 V-0
specific insulation resistance	$>10^{12}$ Ω·m
surface of contact	gold-plated
reflow solderable	yes

Technical Drawing

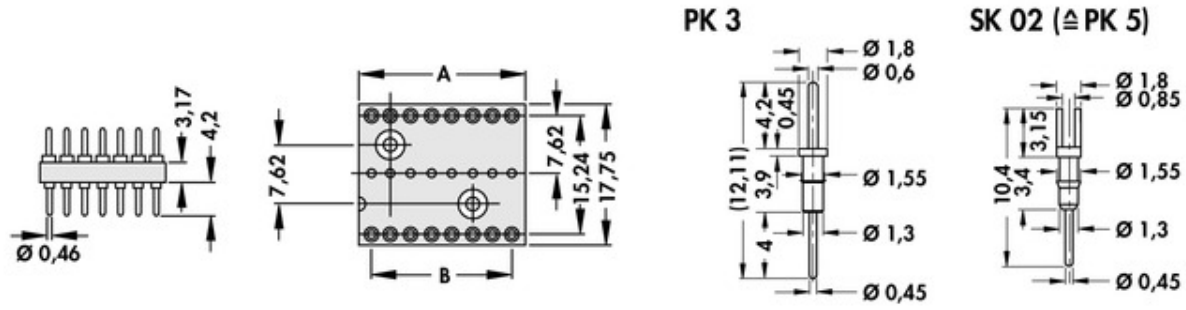

height	50.8
A [mm]	
B [mm]	48.26

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE
Nottebohmstraße 28
58511 Lüdenscheid
Telefon +49 2351 435-0
Telefax +49 2351 45754
info@fischerelektronik.de
www.fischerelektronik.de