4Ch Remote Control

FOR WIRELESS NETWORK 868 MHz

RFT-868-4CH

P.N. 650201377G



DESCRIZIONE

Il telecomando RFT-868-4CH è un trasmettitore palmare a 4 tasti. Ad ogni tasto corrisponde un messaggio differente secondo il protocollo RFTide.

Il numero seriale univoco associato permette l'immediato riconoscimento del dispositivo all'interno della rete.

Alimentazione per mezzo di batteria CR2032.

DESCRIPTION


The RFT-868-4CH is a 4 buttons handheld transmitter.

Each button correspond a different radio message in accordance to the RFTide protocol.

The unique serial number of the device permit to recognise it immediately.

It's equipped with 3V CR2032 battery.


DIMENSION

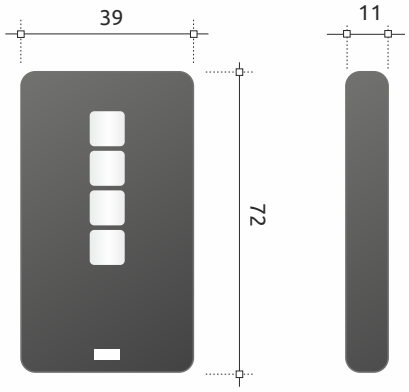



AVAILABLE MODELS

- 1/2/4 channels
- Black or white enclosure
- Plastic or chromed frame
- Proprietary manufacturer code

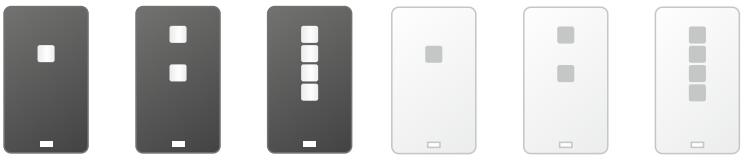

APPLICATIONS

- Home security
- Access control
- Burglar alarms
- Car alarms

TECHNICAL SPECIFICATION

Ta = 25 °C

CHARACTERISTICS		MIN	TYP	MAX	UNIT
Battery supply	Alimentazione con batteria	2.7	3	3.2	Vdc
Working frequency	Frequenza di lavoro		868.3		MHz
Bandwidth	Larghezza di banda		60		Khz
Modulation	Modulazione		FSK		
Current consumption (TX)	Corrente assorbita (TX)			33	mA
Current consumption (standby)	Corrente assorbita (standby)			4	µA
Effective radiated power	Potenza irradiata		5		mW
Operating temperature range	Temperatura di lavoro	-10		+55	°C

Information subject to change without notice

15.10.2016 - Rev A

AUREL S.p.A. • Via Foro dei Tigli, 4 • 47015 Modigliana (FC) Italy • Ph. +39 0546 94 11 24 • F. +39 0546 94 16 60 | www.aurelwireless.com • rfcomm@aurel.it

This information may be subject to revision without notice. AUREL makes no warranty and assumes no liability in connection with any use of this information.